



Captivate

Our dECO Fabric Captivate range offers bold modern colours with a palette of neutrals. The soft, plush feel of Captivate adds an opulent surface texture to any interior. Captivate is inherently durable, does not fray and is Velcro® receptive, offering unlimited styling possibilities.

Applications

Multi-purpose interior fit out fabric. Designed for use on dECO absorptive acoustic panels and screens for use in office, commercial and residential interiors.

Environmental Benefits and Credentials

dECO 3D Tile is manufactured from thermally bonded polyester fibre with a minimum of 60% recycled fibre content from PET packaging such as empty drink bottles.


- GreenTagCert™ certified
- Environmental Product Declaration (EPD) Certified in accordance with ISO 14025
- Product Health Declaration (PHD) certified
- Suitable for Green Star™ projects
- No red list chemicals are present
- No ozone-depleting gases are used during the manufacturing process
- Volatile organic compounds (VOCs) generated in the manufacturing process is classified as low (0.01 mg/m³)s
- Safe, non-irritant, non-toxic, and non-allergenic
- Products are 100% recyclable
- High reuse potential



Martini's Product Stewardship Program can be viewed at www.csrmartini.com.au.

Fabric Care

Vacuum regularly using an upholstery attachment on low suction. Do not use a vacuum attachment with a rotary brush. Brushing may damage the nap or character of the fabric. Treat spills and stains as soon as possible by using a damp cloth. Dry cleaning fluid can also be used. Do not rub or use an excessive amount of water. Blot the excess moisture with a dry clean cloth.

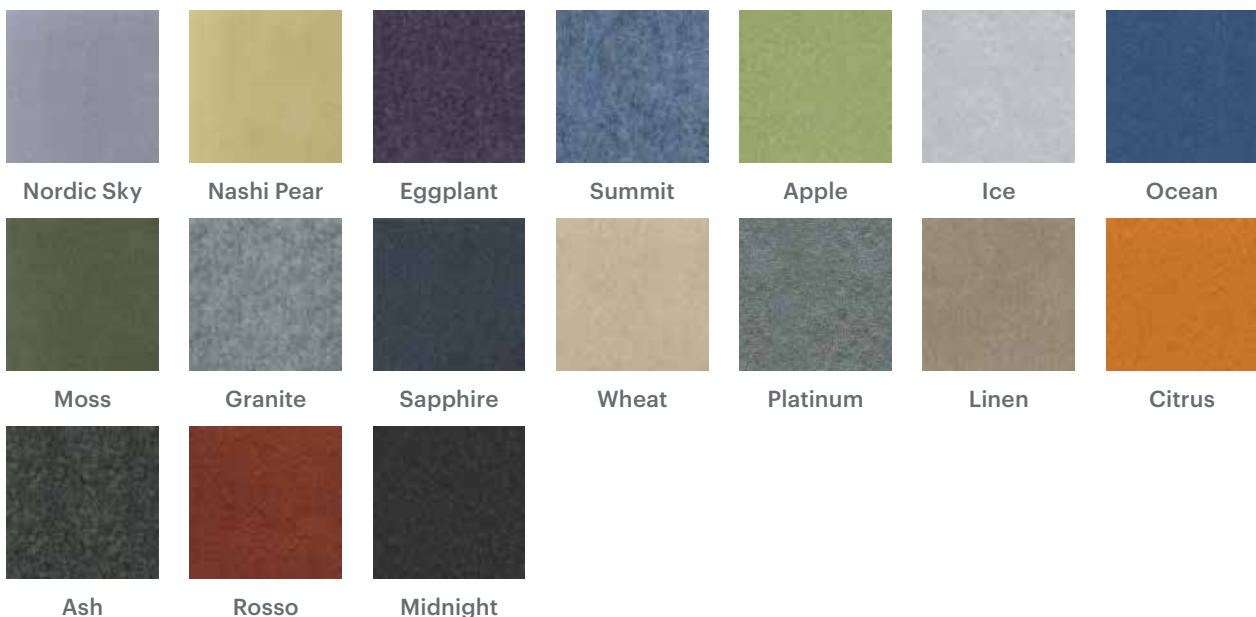



Physical description and properties

| | | | |
|-----------------------------|---|---|-----|
| Thickness/width: | 3-4mm/1350mm | | |
| Melting point: | 255°C | | |
| Vapour pressure: | Not applicable | | |
| Flash point: | More than 420°C | | |
| Other properties: | Non-allergenic, low irritant, low flame response, resilient | | |
| Ingredients: | Organic, long chain synthetic polymer | | |
| Alkalinity: | pH 7.8 (pH 7 is neutral) | | |
| Moisture absorption: | Exposure to an atmosphere of 50°C and 95% RH for four days gives moisture absorption of less than 0.2% by volume | | |
| | Tested to AS ISO 9705 Corner Burn in accordance with AS 5637.1 | Group 1 | |
| | | SMOGRA not more than 100m ² /s ² x 1000 | |
| Fire resistance: | The following results were obtained when CSR Martini product was subjected to early fire hazard testing in accordance with Australian Standards AS 1530.3 | Ignitability | 0 |
| | | Spread of Flame | 0 |
| | | Heat Evolved | 0 |
| | | Smoke Developed | 0-1 |

Disclaimer: The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Martini. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the CSR Martini website for the latest version of this document. The purchaser should independently determine the suitability of the product for the intended use and application.

