w martini



Martini PRIME

High Performance acoustic partition and ceiling insulation

csrmartini.com.au












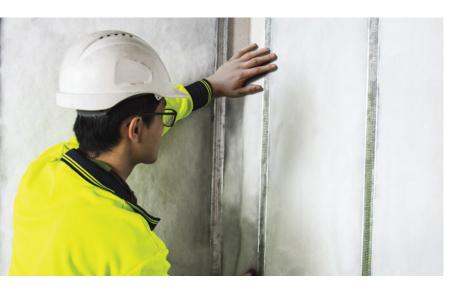

Application

Designed for use in high performance plasterboard, masonry and aerated concrete composite walls and ceilings systems where sound transmission control is required.

Environmental Benefits and Credentials

- $\bullet \ \, \mathsf{GreenTag}^{\mathsf{CertTM}}\,\mathsf{certified}$
- Environmental Product Declaration (EPD)
 Certified in accordance with ISO 14025
- Product Health Declaration (PHD) certified
- Declare certified
- Suitable for Green Star™ projects
- No red list chemicals are present
- No ozone-depleting gases are used during the manufacturing process
- Volatile organic compounds (VOCs) generated in the manufacturing process is classified as low (0.01 mg/m³)s
- Safe, non-irritant, non-toxic, and non-allergenic
- Products are 100% recyclable
- · High reuse potential

Size/Thickness

Thickness: 30 / 50 / 65 / 75 /100mm

Roll sizes: 610mm width x various lengths

Finish/Colour

Available in standard white and black, or grey available upon request.

Fire Resistance

The following results were obtained when CSR Martini Absorb Soffit was subjected to early fire hazard testing in accordance with Australian Standards AS 1530.3.

Ignitability	0
Spread of Flame	0
Heat Evolved	0
Smoke Developed	0-1

Acoustic Performance

Martini Prime has been engineered to produce performance results in wall systems to comply with BCA/NCC acoustic provisions.

Refer to our Acoustic Design Guide for system details and ratings.

Product	30mm	50mm	65mm	75mm	100mm
R Value	0.7*	1.1*	1.4*	1.7*	2.2*

*Calculated R-Value. Martini Prime is also available in 450mm roll width on request and is subject to minimum quantities. Please contact CSR Martini for further details.

For more information on PRIME refer to the data sheet available for download on our website; http://www.csrmartini.com.au/downloads

