



Martini SOFFIT

High performance under slab soffit acoustic insulation



Martini Soffit

- Thermally-bonded polyester fibre insulation specifically designed to provide high performance sound absorption across a range of frequencies for under soffit applications.
- Made in a range of densities and thicknesses with fibre blends specifically engineered to provide maximum acoustic performance in diverse commercial, community and industrial applications.
- Laminated smooth surface on one side.
- Available with pre-drilled holes allow for straightforward installation, reducing labour costs.
- Non-irritant and does not require any protective clothing or masks during installation.
- Available in black, white and grey.

Applications

Martini Soffit is ideal for use as a slab soffit liner in commercial buildings, sports halls, cinemas, studios and retail spaces.

Environmental Benefits and Credentials

Manufactured from thermally bonded polyester fibre with up to 80% recycled fibre content from post-consumer PET packaging such as empty drink bottles.

- GreenTag^{Cert™} certified
- Environmental Product Declaration (EPD) Certified in accordance with ISO 14025
- Product Health Declaration (PHD) certified
- Declare certified
- Suitable for Green Star[™] projects
- No red list chemicals are present
- No ozone-depleting gases are used during the manufacturing process
- Safe, non-irritant, non-toxic, and non-allergenic
- Products are 100% recyclable
- High re-use potential



Martini's Product Stewardship Program can be viewed at www.csrmartini.com.au

Acoustic Performance

Frequencies	125hz	250hz	500hz	1,000hz	2,000hz	4,000hz	Alpha W	NRC
XHD 50	0.19	0.62	1.01	1.02	0.98	0.96	0.90	0.90
XHD 75*	0.45	0.80	1.00	1.00	1.00	1.00	1.00	1.00
XXHD 50	0.19	0.62	1.01	1.02	0.98	0.96	0.90	0.90

*Opinion derived from empirical data.

Product Specifications

Product	Thickness (mm)	Length (mm)	Width (mm)	Sheets /pack*	m ² /pack
XHD 50	50	2400	1200	3	17.28
XHD 75	75	2400	1200	2	11.52
XXHD 50	50	2400	1200	3	8.64

If a decorative finish is required, dECO Quiet Panel is recommended.

XHD 50 is available with uncontaminated surface. We cannot guarantee an uncontaminated finish on XHD 75 or XXHD 50


* sheets per pack is for delivery/packing purposes only, product is sold per sheet.

Martini Soffit Sheet Product Information

Product	Soffit XHD 50	Soffit XHD 75	Soffit XXHD 50
R-Value	1.4	2.0	1.5
NRC	0.90	1.0	0.90

Martini Soffit Pre-drilled Hole Pattern

Available with 8 holes pattern to allow for straightforward installation with ICCONS pins, reducing time on-site and labour costs. Other hole patterns are available. For more information, please contact your CSR Martini representative. For installation details, refer to Martini Soffit Installation Guide.

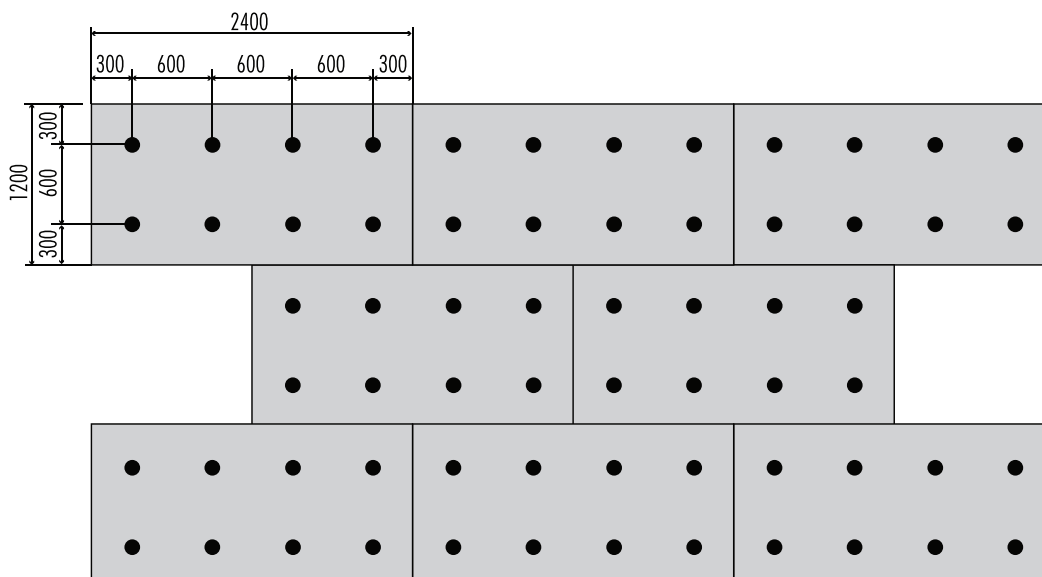

Physical Description and Properties

Melting point: 250°C

Flash point: None allocated

Other properties: Non-allergenic, low irritant, low flame response, resilient

Ingredients: Organic, long chain synthetic polymer

Max service temp: 110°C

Alkalinity: pH 7.8 (pH 7 is neutral)

Moisture absorption: Exposure to an atmosphere of 50°C and 95% RH for four days gives moisture absorption of less than 0.2% by volume

Fire resistance: Tested to AS ISO 9705 Corner Burn in accordance with AS 5637.1

Variations up to XXHD 50mm
Group 1-S
SMOGRA not more than 100m²/s² x 1000

Early fire hazard testing in accordance with AS 1530.3

Ignitability	0
Spread of Flame	0
Heat Evolved	0
Smoke Developed	2

Proudly distributed by



csrmartini.com.au

CSR Martini Pty Limited
P.O. Box 560, Ingleburn NSW 1890
martinienquiries@csr.com.au
1300 767 776

09/22



Disclaimer: The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Martini. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the CSR Martini website for the latest version of this document. The purchaser should independently determine the suitability of the product for the intended use and application.